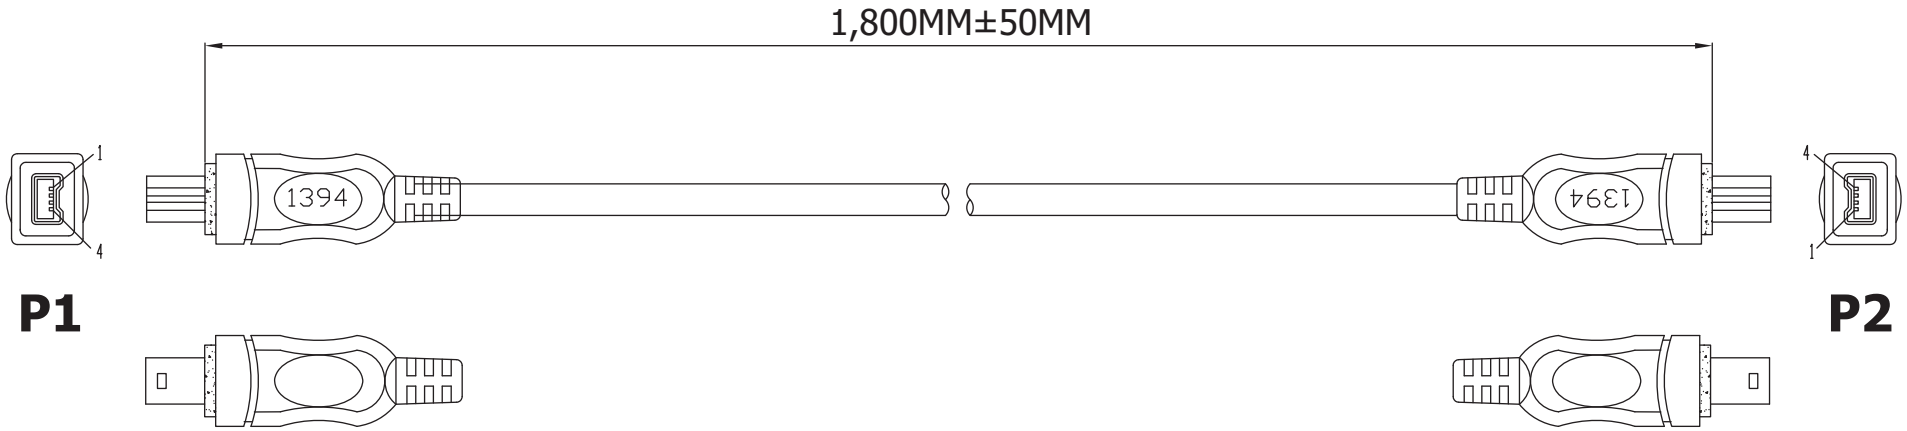

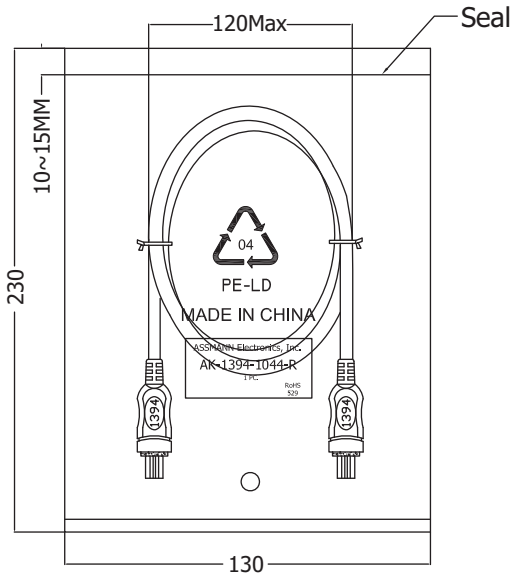

Pin Assignment

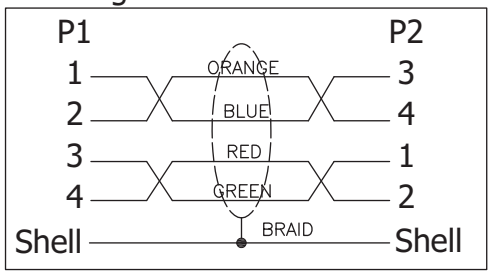

Material:

- Cable: UL20276 [30AWG/1P+AB)*2C+AL/MY+B
  - OD ø4.8MM, stranded
  - Jacket: Black
- P1 & P2 Connectors: IEEE 1394 4P Male
  - G/F Insulation Black
  - Shield nickel plated
- Outer jacket: Black 40P PVC
- Tube: Heat shrink, black, OD 1.5*10MM

Electrical:

- Temperature 80°C
- Rated Voltage: 30V
- Construction type A
- IEEE Compliant

Unit: MM

Scale	1:1						Name
TOLERANCE					Drawn	10.24.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

Item No.

AK-1394-1844-R

Title

IEEE 1394 Cable -
4 Pin Male <=> 4 Pin Male 1.8 Meters

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

ASSMANN WSW components